

# LEVER HANDLES MAINTENANCE GUIDE

To maintain this product's appearance, simply wipe over with a lemon based very mild soap solution and a soft cloth once a month or every 2 weeks in areas of high sea salt such as coastal areas.


#### DO NOT:

Wipe over with a strong cleaning detergent or any cloths which may scratch the surface of the lock.



Wipe highlighted area

Lubricate highlighted area with silicon based oil or graphite

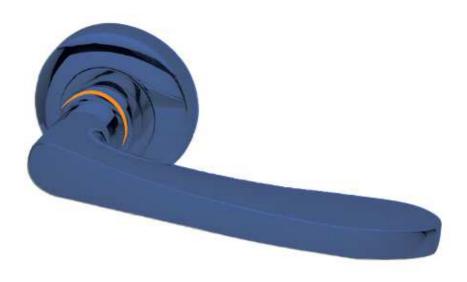



# LOCKCASES LATCHES DEADBOLTS MAINTENANCE GUIDE

To maintain this product's appearance, simply wipe over with a lemon based very mild soap solution and a soft cloth once a month or every 2 weeks in areas of high sea salt such as coastal areas.

#### DO NOT:

Wipe over with a strong cleaning detergent or any cloths which may scratch the surface of the cylinder.

Wipe highlighted area

Lubricate highlighted area with silicon based oil or graphite








# HINGES MAINTENANCE GUIDE


To maintain this product's appearance, simply wipe over with a lemon based very mild soap solution and a soft cloth once a month or every 2 weeks in areas of high sea salt such as coastal areas.



#### DO NOT:

Wipe over with a strong cleaning detergent or any cloths which may scratch the surface of the door handle.



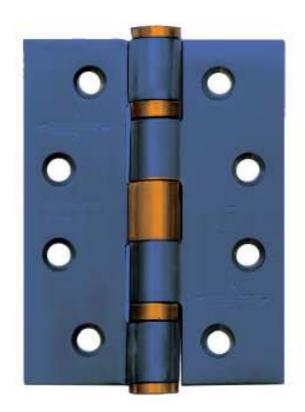



# BATHROOM INDICATOR & TURNS MAINTENANCE GUIDE

To maintain this product's appearance, simply wipe over with a lemon based very mild soap solution and a soft cloth once a month or every 2 weeks in areas of high sea salt such as coastal areas.



Wipe over with a strong cleaning detergent or any cloths which may scratch the surface of the letterplate.





Wipe highlighted area





## **Ironmongery Pack Guarantee Details**



#### Handle Finish

5 years inland (defined as 25 miles from the coast) on aluminium and zamak based handles.

#### Subject to:

- The door handles are applied to a door or door panel.
- The handles are maintained as detailed above.
- No foreign substances come into contact with the handles. Including cleaning products.
- The handles are fitted internally.
- The handles are fitted correctly and are not scratched.

#### Handle Mechanical

5 years inland (defined as 25 miles from the coast) on aluminium and zamak based handles.

## Subject to:

- The door handles are applied to a door or door panel.
- The handles are maintained as detailed above.
- No foreign substances come into contact with the handles. Including cleaning products.
- The handles are fitted internally.
- The handles are fitted correctly, without use of silicone or other adhesives.



#### Lock/latch Finish

10 years inland (defined as 25 miles from the coast) on aluminium and zamak based handles.

#### Subject to:

- The lock/latches are applied to a door or door panel.
- The lock/latches are maintained as detailed above.
- No foreign substances come into contact with the lock/latches. Including cleaning products.
- The lock/latches are fitted internally.
- The lock/latches are fitted correctly, without use of silicone or other adhesives.
- Because of the nature of these products some scratching is to be expected during operation. This is not considered a defect unless the product starts to rust during its guarantee and the other points have been adhered to.

#### Lock/latch Mechanical

10 years inland (defined as 25 miles from the coast) on aluminium and zamak based handles.

## Subject to:

- The door lock/latches are applied to a door or door panel.
- The lock/latches are maintained as detailed above.
- No foreign substances come into contact with the lock/latches. Including cleaning products.
- The lock/latches are fitted internally.
- The lock/latches are fitted correctly, without use of silicone or other adhesives.



### Hinge Finish

10 years inland (defined as 25 miles from the coast) on aluminium and zamak based hinges.

### Subject to:

- The door hinges are applied to a door or door panel.
- The hinges are maintained as detailed above.
- No foreign substances come into contact with the hinges. Including cleaning products.
- The hinges are fitted internally.
- The hinges are fitted correctly and are not scratched.

### Hinge Mechanical

10 years inland (defined as 25 miles from the coast) on aluminium and zamak based hinges.

# Subject to:

- The door hinges are applied to a door or door panel.
- The hinges are maintained as detailed above.
- No foreign substances come into contact with the hinges. Including cleaning products.
- The hinges are fitted internally.
- The hinges are fitted correctly, without use of silicone or other adhesives.
- The door weight does not exceed the grade of hinge.
- At least three hinges are fitted to doors up to 2100mm and four hinges up to 2400mm.