



**Simpli Advanced**<sup>®</sup>

XL Engineered. Secured by ASSA ABLOY.

## Delivery

This is how your Simpli Advanced doorsets will look once prepared and packed ready for delivery. They are packed onto a pallet with an MDF base sheet.

MDF 'transport pads' are attached and the pallet is braced to keep the doorsets stable during transit

The pallet is strapped and finally wrapped with a polythene pallet wrap to protect against damp and adverse conditions prior to installation.

For larger projects, the doorsets are palletised into plot order, ready for dispatch.

Simpli Advanced Doorsets should always be stored flat, ideally in the same room where they are to be installed. They should be protected from damp and dirt and located in an area where they will not be damaged during storage. Doorsets should be left in their protective packaging until ready to be treated and installed.

Doorsets should not be installed where extremes of temperature or humidity can occur, for example a newly plastered room. In new build

environments the doors should only be installed as part of the 'final fit' when the property is ready for final decoration. Gentle internal heating and good ventilation of the building will have a significant reduction with humid conditions.

Please ensure that you check your doorsets for any signs of external damage prior to unpacking. **Note:** Storing, installing or finishing the product in a manner not detailed in these instructions may invalidate the warranty.



## Finishing our doorsets

### Liners

Simpli Advanced FD30 doorsets are supplied with a White Primed liner, which must be painted with a top coat in situ.

Simpli Advanced FD60 doorsets are supplied with an unfinished hardwood liner, which must be finished in situ.

On request we can pre-finish the liners for you here at XL Joinery, for an additional cost.

### Pre-finished Doors

Pre-finished doors in our doorsets do not need finishing prior to fitting and therefore these doorsets can be installed straight away.

### Unfinished Doors


Our Unfinished Oak doors will need to be fully treated prior to, or immediately after install.

The top and bottom of the door, all lock, latch and hinge cut-outs will already have been factory treated during assembly.


Failure to treat all the remaining timber surfaces can lead to excessive changes in moisture content which will cause the timber to shrink or swell and possibly cause splits and distortion.

## Lining components

### FD30

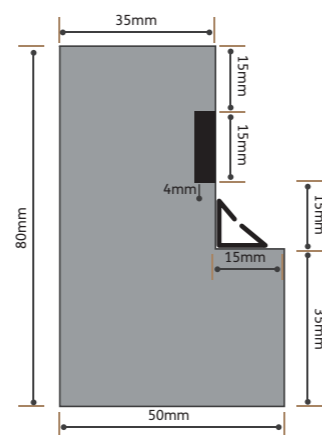

### FD60

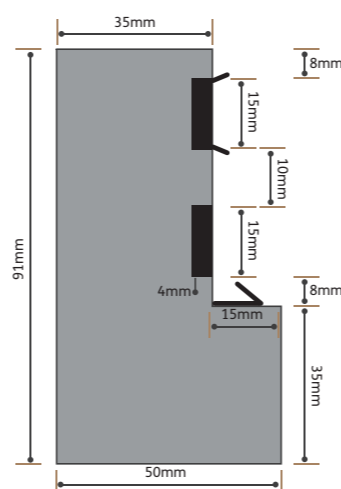

## Fitting our doorsets in 8 easy steps



### STEP 1

Slide the Simpli Advanced doorset into the opening until the fitting pads are touching the surrounding wall.



### STEP 2

At this point the doorset can be squared using packers between the opening and the frame.



### STEP 3

The doorset is secured into the opening by fixing three screws into the lining next to and three opposite the hinges. Two further screws should be fixed into the head.



### STEP 4

The doorset should now be square with equal gaps between the door and the frame.




### STEP 5

Remove the bottom brace and the fitting pads.




### STEP 6

At this point finish the door in accordance with the finishing instructions and paint the Unfinished White Primed liner (FD30).




### STEP 7 - FD30

If you have FD30 doors, they arrive with the batwings already fit.



### STEP 7 - FD60

If you have FD60 doors, fit the supplied batwings to the liners.



### STEP 8

Finally install the handle and any other ironmongery. Test the doorset prior to use. Handle for illustration purposes only.

The perfect fit everytime with our doorsets.