

## Dimensions

### Frame dimensions and structural openings

Door Width	Lining Thickness	Fitting Tolerance	Overall Door Kit Width	Structural Opening Width
533mm (21")	32mm	3mm	603mm	613mm
610mm (24")	32mm	3mm	680mm	690mm
686mm (27")	32mm	3mm	756mm	766mm
762mm (30")	32mm	3mm	832mm	842mm
813mm (32")	32mm	3mm	883mm	893mm
838mm (33")	32mm	3mm	908mm	918mm
526mm	32mm	3mm	596mm	606mm
626mm	32mm	3mm	696mm	706mm
726mm	32mm	3mm	796mm	806mm
826mm	32mm	3mm	896mm	906mm
926mm	32mm	3mm	996mm	1006mm

The fitting tolerance relates to the gap between the door and the lining, this gap should be no greater than 3mm on each side.


The lining will need to be cut down in accordance to individual floor coverings, ensuring the gap under the door is:

- Standard Door - no greater than 10mm off the bottom.
- Fire Door with a Drop down threshold fitted - no greater than 10mm off the bottom.
- Fire Door without a Drop down threshold fitted - no greater than 3mm off the bottom.


All internal Simpli Doorsets are supplied with a 13mm default undercut.

## Lining components

Standard lining components

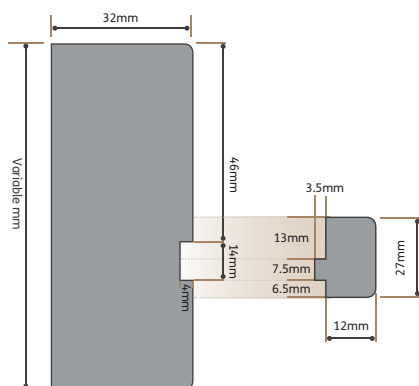

Fire Door lining components

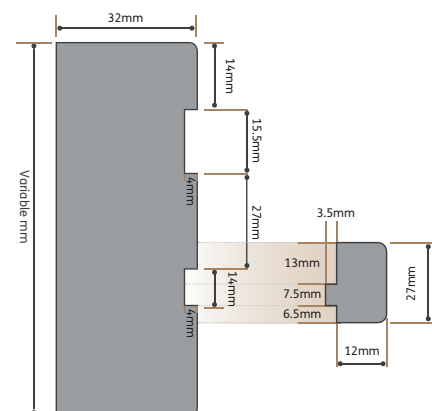

## Handles

Internal handles are available for the Simpli Doorsets from the XL Joinery handle range.